


Remote Dial Thermometer

Marine design


Industrial design

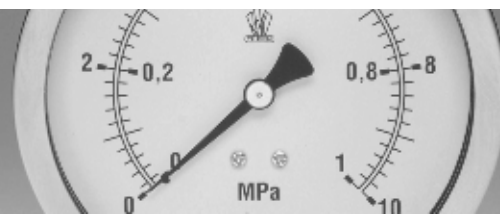

REXOTHERM



RX-3085

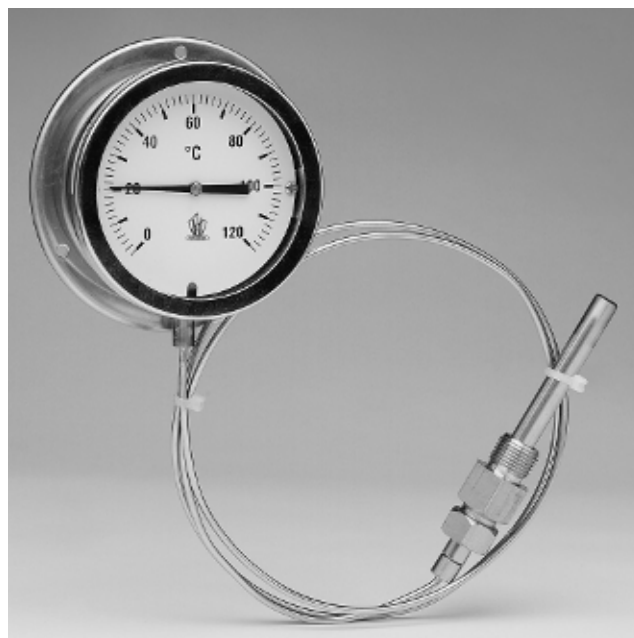

RX-5845


Temperature ranges

-40+ 40°C 0+250°C
-30+ 50°C 0+300°C
-30+ 80°C +50+400°C
-20+ 60°C +50+500°C
0+ 60°C +50+650°C
0+100°C
0+200°C
0+160°C
0+200°C




Technical Data

RX 3085, 5845

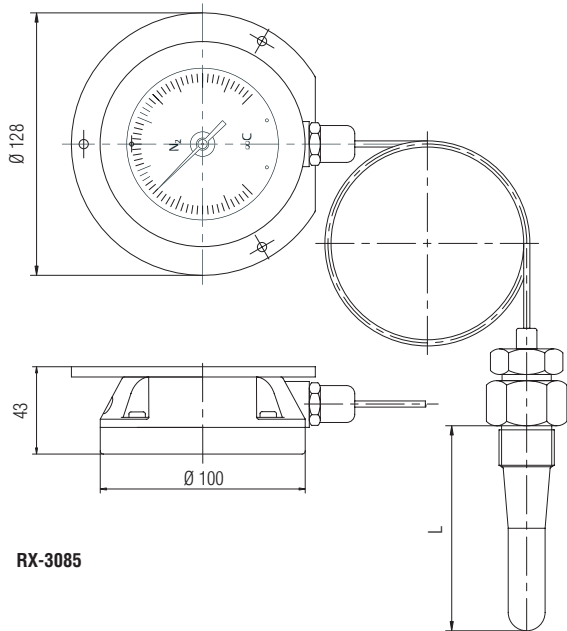

RX-3085

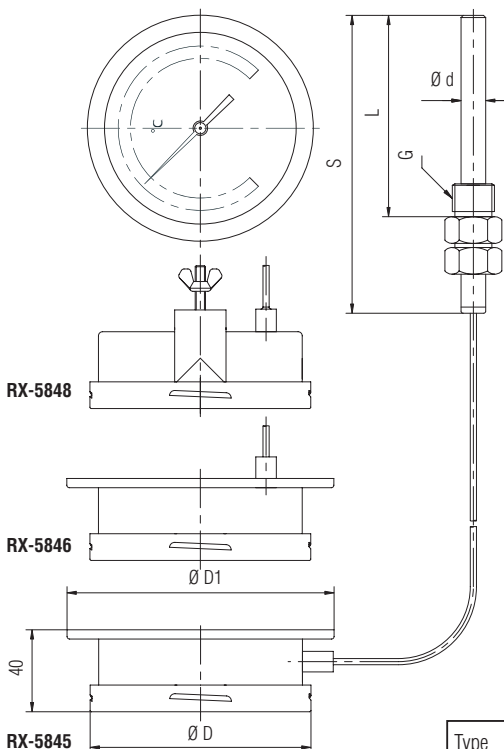

RX-5848

RX-5846

RX-5845

Dimensions

See table below

Casing / Bezel

- 5845 Stainless steel with bayonet bezel, back flange with capillary bottom entry
- 5846 Stainless steel with bayonet bezel, back flange with capillary back entry
- 5848 Stainless steel with bayonet bezel, clamp fixing with capillary back entry
- 3085 Black painted die-cast aluminium, back flange with capillary bottom entry

Measuring System

Nitrogen N2

Max. Working Temperature

Full scale value at continuous operation

Degree of protection

IP 65, IP67

Mounting

See table at side

Immersion Length

To customers' specification

Working pressure

PN25

Connection

Available with alternative unions:

- Adjustable union "C"
- Capped nut "GÖ"
- Screw-in thermowell "CF"

Type	D (mm)	D1 (mm)	Ød (mm)	S and L (mm)	G
RX 5845/RX 5846/RX 5848	110/160	130/185	10/12/13/16	On request (L=min. 100)	On request

